



Unlock the Potential of your 10G/Multi-Gig devices

The XS505M and XS508M come with Copper Ethernet ports that provide either FastEthernet, 1-Gigabit, 2.5-Gigabit, 5-Gigabit or 10-Gigabit connectivity, as well as 1 SFP+ Fiber port with 1-Gigabit or 10-Gigabit connectivity.

Each port automatically detects which speed is needed by the connected device and provides the adequate speed. As opposed to regular 10-Gigabit switches that will only provide 1-Gigabit connectivity to any device that require less than 10-Gigabit, the XS505M gives the exact speed required, no downgrade. Also, the new NETGEAR Multi-speed switch ports can be connected with regular Cat5E Ethernet cables, without the need to upgrade to Cat6 wiring, therefore reducing wiring costs and hassle

Highlights

Multi-Speed Technology

- Expand your network instantly, and give your devices either 100Mb, 1, 2.5, 5 or 10 Gigabit, automatically

Plug and Play

- Simple set up with no software or configuration needed

Flexible Mounting

- Rackmount or Desktop Switches

SFP+ Port

- One SFP+ Fiber port with 1-Gigabit or 10-Gigabit connectivity – Ideal for high-speed uplink connectivity to your core network

High Quality and Reliable Performance

- Durable metal case and long product life (shown by MTBF numbers)

Whisper Quiet

- Whisper Quiet switch with an active fan

Industry leading warranty

- LIFETIME 24/7 Technical Support
- LIFETIME Hardware Warranty*




Hardware at a Glance

Model Name	Form-Factor	10-Gig/Multi-Gig Copper Ports	Internal Power Supply	10G SFP+ Ports	LED's	Case Material	Fans
XS505M	Rackmount/Desktop	4	Yes	1	Power, Fan, Port Link/Speed/Activity	Metal	Active Fan
XS508M	Rackmount/Desktop	7 ¹	Yes	1 x 10G/1G SFP+ and Copper (combo)	Power, Fan, Port Link/Speed/Activity	Metal	Active Fan



XS505M

- 4 x 10-Gig/Multi-Gig Copper Ports
- 1 x SFP+ Ports
- 19-inch Rackmountable




XS505M-Back

- Internal PSU



XS508M

- 7¹ x 10-Gig/Multi-Gig Copper Ports
- 1 x 10G/1G SFP+ and Copper (combo)
- 19-inch Rackmountable



XS508M-Back

- Internal PSU


Performance at a Glance

Model Name	Fabric	Packet buffer	Latency (Max Connection Speed)	VLANs	MAC Address Table	Priority Queues	Multicast IGMP Group	Packet Forwarding Rate (64 byte)	Jumbo Frames (bytes)
XS505M	100 Gbps line-rate	128KB	10Gbps: 4.845us 1000Mbps: <4us 100Mbps: <6us	N/A	2K Entries (dynamic)	8 (WRR)	N/A	10Gbps: 14,880,952fps 5Gbps: 7,440,476fps	up to 9K
XS508M	160Gbps line-rate	128KB	10Gbps: 4.913us 1000Mbps: <4us 100Mbps: <6us	N/A	2K Entries (dynamic)	8 (WRR)	N/A	2500Mbps: 3,720,238fps 1000Mbps: 1,488,095fps 100Mbps: 148,810fps	up to 9K

¹ Port #8 is a combo Port

Example Application

XS505M/XS508M in a Business Environment

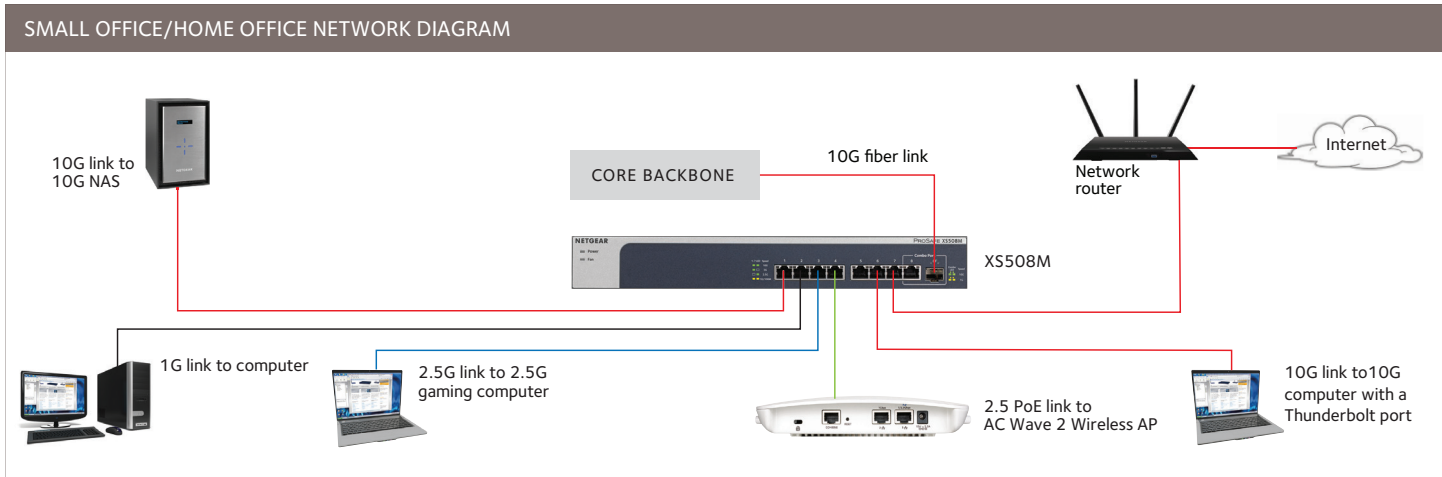

Cables and Speed

The following table describes the network cables that you can use for the switch connections and the speeds that these cables can support, up to 100 meters (328 feet).

SPEED	CABLE TYPE
100Mbps	Category 5 (Cat 5) or higher rated
1Gbps, 2.5Gbps, or 5Gbps	Category 5e (Cat 5e) or higher rated
10Gbps	Category 6A (Cat 6A) or higher rated



Note: For speeds of 10 Gbps, if the cable length is shorter than 45 meters (148 feet), you can use a Cat 5e cable.

Why the NETGEAR 10-Gig/Multi-Gig Switches are ideal for SMB

1. Plug-and-play, automatic connectivity to your router or modem of 4 additional wired connections. No need for an IT expert!
2. Expand your network instantly, and give your devices either 100Mb, 1, 2.5, 5 or 10-Gigabit, automatically
3. Small and silent desktop or rackmount form factor for quiet operation – Adapts to your needs and configuration in any environment
4. ProSAFE® LIFETIME Warranty, Next Business Day replacement and 24/7 chat with a NETGEAR expert
5. Energy efficient switches that automatically adjust power consumption according to the link status and cable length.

Technical Specifications

XS505M/XS508M

PRODUCT	XS505M	XS508M
		
100M/1G/2.5G/5G/10G RJ-45 copper ports	4	7
10G SFP+ ports	1	1 x 10G/1G SFP+ and Copper (combo)
Form Factor	Desktop/Rackmount	Desktop/Rackmount
PERFORMANCE SPECIFICATION		
Packet buffer memory (Dynamically shared across only used ports)	128KBMB	
Forwarding modes	Store-and-forward	
Bandwidth	100Gbps	160Gbps
MAC Address database size (48-bit MAC addresses)	2K	
Packet forwarding rate (64 byte packet size) (Mpps)	10Gbps: 14,880,952fps 5Gbps: 7,440,476fps 2500Mbps: 3,720,238fps 1000Mbps: 1,488,095fps 100Mbps: 148,810fps	
Speed / Latency	100Mbps: <6µs 1Gbps: <4µs 2.5Gbps: TBD 5Gbps: TBD 10Gbps : TBD	
Jumbo frame support	Up to 9K packet size	
Acoustic noise level @ 25°C (dBA) (ANSI-S10.12)	22.5	
Mean Time Between Failures (MTBF) @ 25°C	1093237 hours	1145157 hours
POWER/ENERGY EFFICIENCY)		
802.1p-based QoS/CoS Supported	Yes	
Auto Power Down	Yes	
Short Cable Detection/Power Saving	Yes	
QUALITY OF SERVICE (QOS)		
IEEE 802.3az (Energy Efficient Ethernet)	Yes	
Honors DSCP (DiffServ) Tags	Yes	
Weighted Round Robin (WRR)	Yes	
Priority Queues	8	
IEEE NETWORK PROTOCOLS		
<div><div><ul style="list-style-type: none">• IEEE 802.3 Ethernet• IEEE 802.3u 100BASE-TX• IEEE 802.3ab 1000BASE-T• IEEE 802.3x Full-Duplex Flow Control• IEEE 802.1p Class of Service• IEEE 802.3az Energy Efficient Ethernet (EEE)</div><div><ul style="list-style-type: none">• IEEE 802.3an 10GBASE-T• IEEE 802.3bz 5Gbps and 2.5Gbps Ethernet Over Copper Twisted Pair Cable• IEEE 802.3ae 10-Gigabit Ethernet Over Fiber• IEEE 802.3aq 10-Gigabit over Fiber (10GBASE-LRM)• IEEE 802.3z Gigabit Ethernet 1000BASE-SX/LX</div></div>		

10-Gigabit/Multi-Gigabit Ethernet Unmanaged Switches

Data Sheet

XS505M/XS508M

PRODUCT	XS505M		XS508M
LEDS			
Per port	Speed, Link, Activity		
Per device	Power and Fan		
PHYSICAL SPECIFICATIONS			
Dimensions (W x D x H)	328 x 169 x 43.2 mm (12.91 x 6.65 x 1.7 in)		
Weight	1.38kg	1.49kg	
POWER CONSUMPTION			
Power Supply	Fixed internal PSU, 100-240VAC, 50-60Hz, 1A max Power cord localized to country of sale		Fixed internal PSU, 100-240VAC, 50-60Hz, 1.5A max Power cord localized to country of sale
Max power (worst case, all ports used, line-rate traffic) (Watts)	22.5W		39W
Min power (link-down standby) (Watts)	12.25		21.31
Heat Dissipation (max and min) (BTU/hr)	85.3/46.4		147.86/80.8
Fan(s)	x1		
ENVIRONMENTAL SPECIFICATIONS			
Operating			
Operating temperature	0° to 50°C (32° to 122°F)		
Humidity (relative)	95% maximum relative humidity (RH), non-condensing		
Altitude	10,000 ft (3,000 m) maximum		
Storage			
Storage temperature	-20° to 70°C (- 4° to 158°F)		
Humidity (relative)	95% maximum relative humidity (RH), non-condensing		
Altitude	10,000 ft (3,000 m) maximum		
ELECTROMAGNETIC EMISSIONS AND IMMUNITY			
Certifications	47 CFR FCC Part 15, SubpartB, ClassB ICES-003:2016 Issue 6, ClassB ANSI C63.4:2014		
	EN 55022:2010 + AC:2011, Class A EN 55024:2010 EN 61000-3-2:2014, Class A EN 6100-3-3:2013		
	AS/NZS CISPR 22:2009 + A1:2010, Class B		
	VCCI V-3/2015.04, Class A V-4/2012.4		
	Russia EAC mark		
	Korea KC mark		
	CNS 13438		
Electromagnetic Compliance (Class A or B)	Class B		

10-Gigabit/Multi-Gigabit Ethernet Unmanaged Switches

Data Sheet

XS505M/XS508M

PRODUCT	XS505M	XS508M
SAFETY CERTIFICATIONS		
Certifications	CB mark, commercial IEC 60950-1:2005(ed.2) + A1:2009 + A2:2013	
	UL/cUL Listed (UL 60950-1)/CAN/CSA C22.2 No. 60960-1-07	
	EN 60950-1: 2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013	
	IEC 60950-1:2005 (ed.2)+A1:2009+A2:2013	
	AS/NZS 60950.1:2015	
	Russia EAC mark	
WARRANTY AND SUPPORT		
	ProSAFE Limited Lifetime Warranty	
	Lifetime 24x7 Online Technical Support*	
	Lifetime Next-Business-Day (NBD) Replacement	
ProSUPPORT OnCall 24x7, Service Packs**	Category 1: PMB0311 (1 yr.) PMB0331 (3 yrs.) PMB0351 (5 yrs.)	

Ordering Information

XS505M/XS508M

PACKAGE CONTENT	
All Models	XS505M or XS508M 10-Gigabit/Multi-Gigabit Ethernet Unmanaged Switch
	Power cord (localized to country of sale)
	Rack-mounting kit
	Quick install guide
Easy-Mount additional options (GS418TPP)	Mount for attachment to a wall, or rectangular pole
	Rubber belts
	Velcro straps
	Power cord locker
ORDERING INFORMATION	
XS505M-100NAS	North America and Latin America
XS505M-100EUS	Europe and United Kingdom
XS505M-100AJS	Asia Pacific and Australia
XS508M-100NAS	North America and Latin America
XS508M-100EUS	Europe and United Kingdom
XS508M-100AJS	Asia Pacific and Australia
OPTIONAL MODULES AND ACCESSORIES	
AFM735	SFP Transceiver 100BASE-FX (multimode)
AGM731	SFP Transceiver 1000BASE-SX (Short range, multimode)
AGM732F	SFP Transceiver 1000BASE-LX (Long range, single mode)
AGM734	SFP Transceiver 1000BASE-T Copper RJ45 GBIC
AXC761	10GSFP+ Cu (passive) SFP+ to SFP+ Direct Attach Cable 1m
AXC763	10GSFP+ Cu (passive) SFP+ to SFP+ Direct Attach Cable 3m
AXM761	10GBASE-SR SFP+ GBIC (OM3/OM4 Multimode)
AXM762	10GBASE-LR SFP+ GBIC (Single mode)
AXM763	10GBASE-LRM SFP+ GBIC (Long Reach Multimode for OM1/OM2, also compatible with OM3/OM4)
AXM764	10GBASE-LR LITE SFP+ GBIC (Single mode)

* This product comes with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and modifications to product may void the warranty; covers hardware, fans, and internal power supplies - not software or external power supplies; see <http://www.netgear.com/about/warranty/> for details. Lifetime technical support includes basic phone support for 90 days from purchase date and lifetime online chat support when purchased from a NETGEAR authorized reseller.

** The NETGEAR OnCall 24x7 contract provides unlimited phone and email technical support for your networking product. For ProSAFE products purchased prior to 06/2014, also includes next business-day hardware replacement.

† NETGEAR #1 in Fixed Web(Smart)-Managed Worldwide Market Share according to IHS Infonetics Ethernet Switches Market Share and Forecast, 1Q17 Edition, Dec 2016.

NETGEAR and the NETGEAR Logo are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. © 2017 NETGEAR, Inc. All rights reserved.

NETGEAR®

REPRESENTADO EN MÉXICO POR TELSA MAYORISTA

Oriente 65A No. 2848, Asturias, Cuauhtémoc, 06850, CDMX, México

Tels.: +52 (55) 5740 2142 / 5740 0606 • ventas@telsa.com.mx • www.telsa.com.mx

Síguenos en: [Twitter.com/TelsaMayorista](https://twitter.com/TelsaMayorista) • [Facebook.com/TelsaMexico](https://facebook.com/TelsaMexico)



Contáctanos:

