



Aurora Cloud Access Camera

Aurora is the natural light in the polar sky. Inspired by the beautiful aurora colors that enlighten the dark, Zyxel Aurora Cloud Access Camera features an intelligent color LED indicator that records color night vision even in low-light environments. We aim to provide users more security even they are away from home.

Benefits

4-in-1 placement design

We designed the Zyxel Aurora Cloud Access Camera to match all types of surfaces or environments. You can put the stand away to have the cam hidden, or you can stick it on the fridge or metallic shelf with a magnet holder to easily watch over your backyard. We also provide a set of wall mount kit for expansion.



4-in-1 placement design, standing, magnet, wall-mounted and sitting on the table



From installation to recording live views all in an easy, secure 1-minute setup



Full color recording under low-light conditions



145-degree field of view with 1080p Full HD video quality



Get fast push notification from the zone and motion detection function



Free 16GB storage and compatibility with Zyxel's personal cloud storage extension solution


Free 16GB storage allows continuous event recording

It works wherever you are in the world with myZykelCloud. Complete with a simple single sign-on account, you can quickly get the live view of your Zyxel Aurora Cloud Access. Equipped with 16GB storage, you have enough time to react and check the footage of what had happened in the captured area!




High-quality image sensor for full-color recording

The Zyxel Aurora can capture it all in full color even in low-light conditions. No more ghostly monochromatic recordings for you to only speculate who had intruded your property.

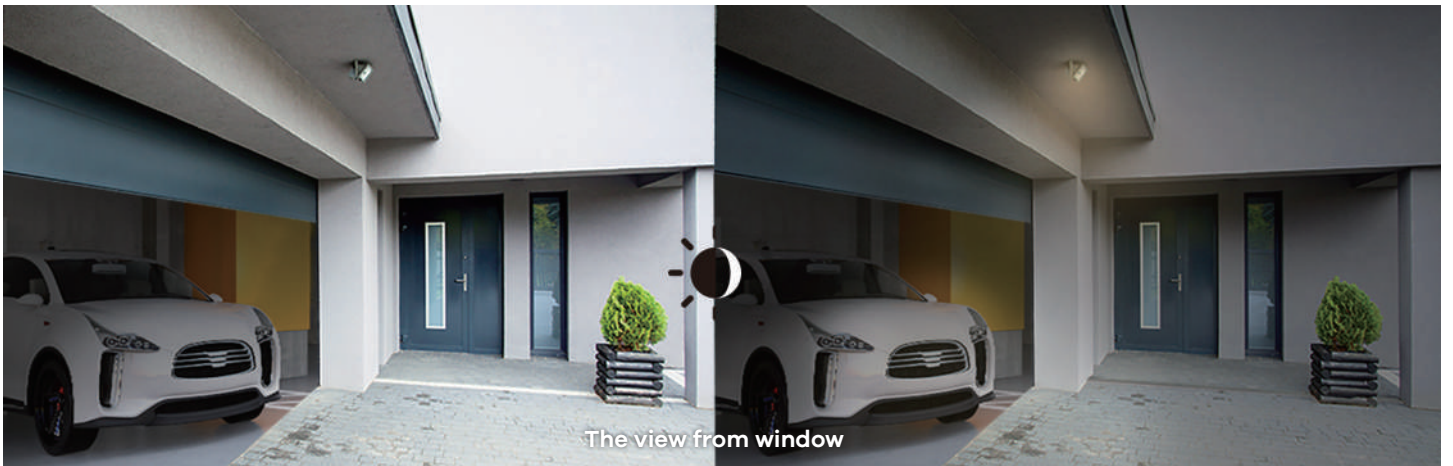

Featured with Sony Starlight sensor

Aurora is powered with a Sony sensor and paired with large F2.0 aperture lens, the Aurora is able to capture low light environments with high definition quality while retaining color. Capture a full large room with its ultra wide angle 145° lens.

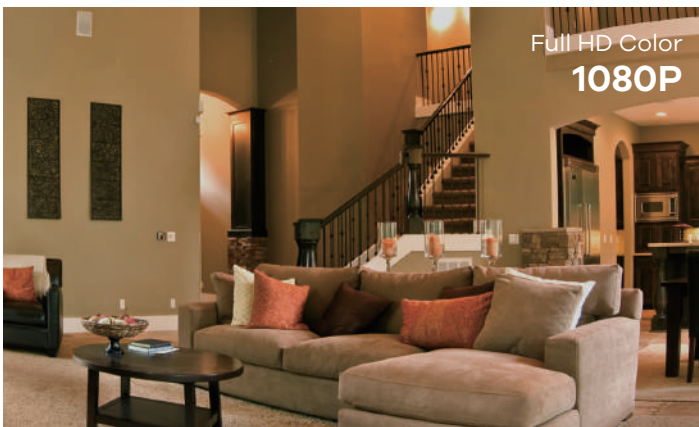

Intelligent LED lights

Multifunction LED lights can be used to startup your camera. During the installation, it shows different colors to indicate statuses like standby mode, Wi-Fi connection, or firmware upgrade. The LED can be turned on in a complete dark room as a fill light.



Smart motion detection notifies you of activities with push notifications

You can access the latest events triggered by motions on mobile phones, or you can receive three snapshots of the movement via email. The Zyxel Aurora keeps the recording history for at least 1 second before the motion triggers and continues recording for 30 seconds. We make sure you won't miss any important scene.




Simple clip and go to add more features — Get a Power-over-Ethernet or alarm beeper

Just attach a PoE module to the Zyxel Aurora for a cleaner, simpler look; or you can have the Aurora camera to scare off intruders with an alarm. Just attach the alarm module to the Aurora camera to fend off intruders with its loud sound and allow neighbors to know there's something wrong in your house. The Zyxel Aurora's modular systems enable you to customize your security needs.




User-friendly and intuitive app

Quickly get your home secured with Zyxel's guided step-by-step Aurora app. Use your smartphone to quickly get the Zyxel Aurora camera up and running in a few minutes. No additional fee for watching streaming video or to receive push notification on you phone or by Email.

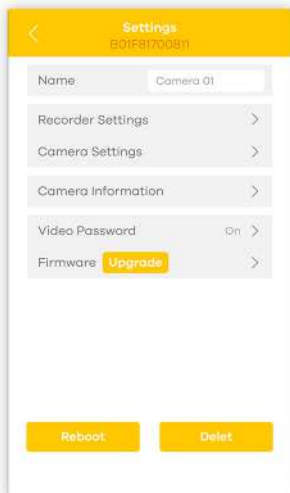


Function Description

Name your Aurora cameras and tune the camera settings to your need. Upgrade Aurora cameras with the latest software version here.

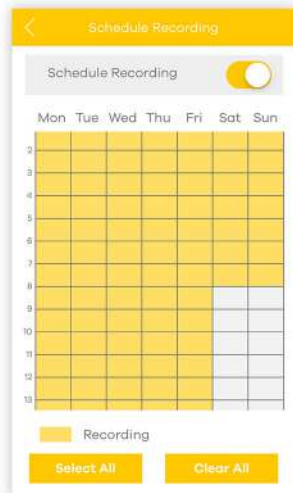

Scheduled Recording

The Aurora camera offers high flexibility on when you would like to record.

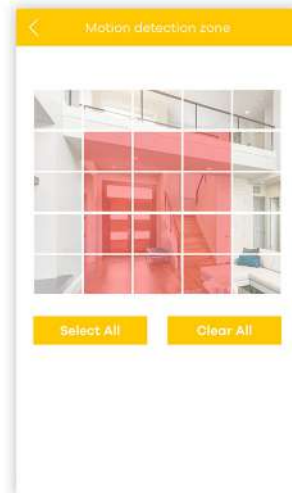

Motion Detection Zone

Set certain areas for motion detection to prevent detection errors including, but not limited to: curtain movements, wind blown objects, and many more. Capture only the necessary areas without being bothered by unnecessary alerts.



Event Notifications

Get notifications when events occurred are captured from your Aurora camera. Not only does the app offer notifications, but also get email notifications, so that you never miss what's happening.



Download App
Q Zyxel Aurora

Storage Plan

No extra fee for record storage

If you need more storage for recording, grab a Zyxel Personal Cloud Storage device to safely store your recordings and choose the storage capacity you want. No more need to figure out monthly payment plans of typical online cloud service or to worry about if your recordings are viewed without authorization; because you control where your recordings go with Zyxel's all-in-one solution. Record and live stream continuously 24/7 with the 16GB free embedded storage, or you can store more data to the Zyxel personal cloud storage.



Front



Rear



Aurora Camera



Magnetic Stand



Mounting Bracket



USB Type-C Cable

Specifications

System Specifications

Network

- Wi-Fi 802.11n
- Bluetooth 4.1

Storage Plan

- Free 16GB storage, and support Zyxel Personal Cloud Storage expansion
- No monthly fee

Accessory

- Wall-mounting kit
- 3 m (10 ft) power cable
- Detachable AC power adapter (Output 5V 2A DC)
- Alarm beeper module (Optional)
- PoE extension module (Optional)

App

- Simple & intuitive setup
- Full function, no monthly fee
- Zone detection with notifications
- Scheduled recording
- One button arm and disarm setting
- Support Android, iOS
- Support Languages: English/French/German/Italian/Spanish/Turkish/Thai/Traditional Chinese/Simple Chinese

Hardware Specifications

- Image sensor:
 - Sony 1/2.8", 2.1 Megapixel back illuminated CMOS sensor
 - Diagonal 6.46 mm Square Pixel Array Color
- Lens:
 - 6 glass elements with IR filter
 - Focal length 2.8 mm/F 2.0
 - 145° field of view
- Recording mode:
 - By motion (25 detection zones)
 - By schedule
 - 24/7 continuous
- Format:
 - Video: 720p/1080p H.264
 - Audio: AAC
- Audio:
 - Microphone: Omini-directional x 1
 - Speaker: 0.48 W x 1
- Lights: RGB light bar
- Power:
 - USB Type-C connector
 - Power rating 5V/2A max.
 - Consumption: 4 watt max.

Physical Specifications

- Item dimensions (HxWxD):
129 x 68 x 83 mm (with stand)
(5.08" x 2.68" x 3.27")
- Item weight: 213 g
(0.47 lb. excl. extension module)
- Packing dimensions (HxWxD):
152 x 98 x 224 mm (with stand)
(5.98" x 3.86" x 8.82")
- Packing weight:
 - EU: 880 g (1.94 lb.)
 - US/TW: 860 g (1.90 lb.)

Environmental Specifications

Operating Environment

- Temperature:
0°C to 40°C (32°F to 104°F)
- Humidity:
10% to 90% (Non-condensing)

Storage Environment

- Temperature:
-30°C to 70°C (-22°F to 158°F)
- Humidity:
10% to 95% (Non-condensing)

Certifications

- Safety: CE-LVD, BSMI
- EMC: CE, FCC, BSMI

Package Contents

- Full-HD camera
- Power adapter
- 3 m (10 ft) power cable
- Mounting kit
- Quick start guide

ZYXEL

Your Networking Ally

DISTRIBUIDO EN MÉXICO POR TELSMA MAYORISTA

Tels.: +52 (55) 5740 2142 / 55 5740 0606 • ventas@telsa.com.mx • www.telsa.com.mx

Síguenos en: [Twitter.com/TelsaMayorista](https://twitter.com/TelsaMayorista) • [Facebook.com/TelsaMexico](https://facebook.com/TelsaMexico)



Contáctanos:



For more product information, visit us on the web at www.zyxel.com

Copyright © 2017 Zyxel Communications Corp. All rights reserved. Zyxel, Zyxel logo are registered trademarks of Zyxel Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.

Datasheet [Aurora](#)



5-100-00617001 02/17