NVR3308

16-64 CH Megapixel RAID NVR



- Support 16-64 CH Megapixel Recording (Up to 5MP or Above)
- Support 8-bay SATA Hard Disk
- Support RAID 1, 5, 6 for Data Protection
- Built-in Real-Time Video Intelligence Detection
- Built-in Dual Display
- Support Surveon Control Center (SCC)
- In-House Design & Production
- 2-Year Warranty

Software Specifications

Live View	 Real-time network camera discovery Versatile views of various screen divisions Multiple views supported View patrolling for single or multiple views Real time video/event alarm monitoring Support 3 installation modes and 5 different fisheye dewarp display modes Support live audio 	Recording Policy	 Supports up to 96 channels megapixel recording (depends on product) Continuous recording Event-driven recording along with rules Scheduled recording on daily or weekday basis Post alarm recording 1-300 seconds Pre-alarm recording 1-300 seconds Support individual schedule recording 			
eMAP	Drag-n-drop camera manipulation Hierarchical and multiple layer map structure Real time event alert Instant live video of camera	Rule Manager	 Conditional recording/alert/notification Email, FTP, SMS, popup window, PTZ, VI Panel, Relay output notifications Sound, alarm, round-the-clock alerts Support email template 			
ΡΤΖ	 Pan, tilt, and zoom operations (depends on camera) Built-in PTZ control panel Preset position (depends on camera) Event-driven camera patrolling Support OnScreen PTZ 	Remote Management Remote Client	Remote operation & management via VMS Client Remote management and control via SCC & SCC Client			
Ι/Ο	Digital I/O management Support Ethernet Digital I/O Controller	3rd Party IPCAM	Web Client iPhone client Android Client Support ONVIF Profile S & ONVIF Scan ACTi, Arecont Vision, Axis, Dahua, Dynacolor,			
Multiple Displays	 Support dual monitors Supports live view, playback, eMap functions (depends on product) Direct display to secondary monitor(s) 	Storage Expansion	Hikvision, IQinvision, Mobotix, Panasonic, and more Built-in RAID storage management Recording to iSCSI/NAS Backup to iSCSI/NAS 			
Investigation	 Search by date, time, and camera Search by VI event combinations Search over multiple days Search over multiple cameras Different colored recording indicator on calendar Search via built-in VI analyzer Intuitive, video thumbnail search results Cue-in, cue-out and loop playback Quick playback by video thumbnails 1/8, 1/4, 1/2, 1x, 2x, 4x, 8x play, pause, stop AVI-formatted video clip export Up to 16 channel synchronized playback (depends on product) Support 3 installation modes and 5 different fisheye dewarp playback display modes 	General & Misc.	 Video privacy mask Digital zoom in, zoom out Log viewer, log export mechanism Client auto login Automatic storage recycling Client-server architecture Customized authority account management Digital watermark proofing Support DDNS function Support time synchronization with NTP server Provide System and VI setup Help assistance Support Customized Event management and log mechanism Auto port mapping for internet connection Support batch setting IPCAM parameters 			
Video Intelligence	•Yes		 Support Health Check function Support standby recording (Failover) Support offline recording with Surveon cameras Support APC SMART-UPS 			
		Language	Support multiple language on VMS including English, Czech, Dutch, French, German, Italian, Japanese, Korean, Persian, Polski, Portuguese, Russian, Slovak, Spanish, Turkish, Simplified Chinese, Traditional			

Network Video Recorder


Chinese



NVR3308

16-64 CH Megapixel RAID NVR

Functions

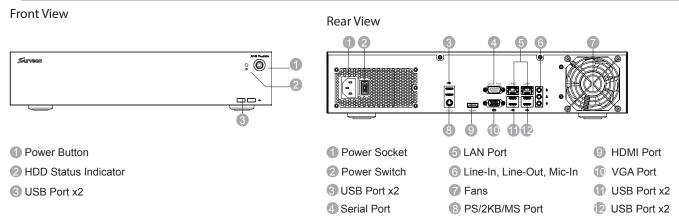

Hardware Specifications

NVR3308 Series					
System Processor	NVR3308E1: Intel® Core i3 Dual Core 3.3GHz NVR3308A1: Intel® Core i7 Quad Core 3.4GHz				
System Memory	DDR3 4GB (up to 16GB)				
Operating System	Linux Embedded System				
Storage	8 x 3.5" SATAII/SATAIII hard disk drives				
I/O Interface	• RJ-45: 2x Gigabit Ethernet • USB: 8x USB2.0 • VGA: x1, HDMI: x1				
RAID	Non RAID, 1, 5, 6				
Electrical	• Input voltage: 100-240V, 3.5A • Power Supply: 250W				
Operating Environment	• Humidity: 5% to 80% (non-condensing) • Temperature: 5° to 40°C				
LED Indicator	Yes (Power, HDD)				
Dimensions	88(H) x 430(W) x 390(D) mm				
Weight	≤9kg (without HDD)				
Certification	UL, CB, FCC/CE Class A				
Warranty	2 years				
DOM	4GB				

Ordering Information

Model Name	Description
NVR3308E1-16	16 CH, 8 Bay Megapixel RAID NVR
NVR3308E1-24	24 CH, 8 Bay Megapixel RAID NVR
NVR3308E1-32	32 CH, 8 Bay Megapixel RAID NVR
NVR3308A1-16	16 CH, 8 Bay Megapixel RAID NVR, i7 CPU
NVR3308A1-24	24 CH, 8 Bay Megapixel RAID NVR, i7 CPU
NVR3308A1-32	32 CH, 8 Bay Megapixel RAID NVR, i7 CPU
NVR3308A1-48	48 CH, 8 Bay Megapixel RAID NVR, i7 CPU
NVR3308A1-64	64 CH, 8 Bay Megapixel RAID NVR, i7 CPU
ZCD5H-0010	SCC with 5 Host License
ZCD10H-0010	SCC with 10 Host License
ZCD20H-0010	SCC with 20 Host License
ZCDULT-0010	SCC with Unlimited Host License

NVR3308



Network Video Recorder

SurveOne Specifications

Browser-Based System Status Monitoring					
System Monitoring	 NVR/camera system status overview NVR device/network/storage real-time status monitoring Camera real-time status monitoring 				
Configurations	 Easy NVR/camera configuration copy Easy NVR/camera configuration backup/restore 				
Event Log	 NVR/camera real-time event log information Critical error/error/warning multi-level event classifications 				

Optional Accessories

Part Number	Description
ZJOYSTICK-0050	CH Products, IP Desktop USB Joystick. 3 axes joysticks for P/T control, 12 HID buttons, USB 1.1 HID compliant, Easy to use and operate.
ZETHIOBOX-0030	Ethernet I/O Box, Ethernet Digital I/O Controller, Digital Input x6, Digital Output x3 (for VMS 2.4.8)
ZPOE08-0030	8 Port 10/100Mbps 120W PoE Switch
ZPOE26-0030	24 Port 10/100Mbps + 2 Port GBE Combo (UTP/ SFP) 380W PoE Switch
ZSlideRail27-0030	Slide Rails for NVR3xxx-xx32 Series products, for 23"~27" deep racks
ZSlideRail36-0030	Slide Rails for NVR3xxx-xx32 Series products, for 27"~36" deep racks
H72A1XA3XXX-0030	Hitachi, Enterprise, 2TB SATA HDD, 6Gb/s
H72A2XA2XXX-0030	Hitachi, Enterprise, 3TB SATA HDD, 6Gb/s
H72A3XA3XX1-0030	Hitachi, Enterprise, 4TB SATA HDD, 6Gb/ss
HSLT72A3200-00301	Toshiba, Desktop, 2TB Surveillance SATA HDD, 6Gb/s
HSLT72A3300-00301	Toshiba, Desktop, 3TB Surveillance SATA HDD, 6Gb/s
HSLT72A3400-00301	Toshiba, Desktop, 4TB Surveillance SATA HDD, 6Gb/s

* Hard disk drives (HDD) are purchased separately. When selecting HDDs, HDD manufacturers always urge users to choose enterprise/surveillance grade drives for 24/7 surveillance operations to ensure system stability. The surveillance hard drives on our Approved Vendor List (AVL) are engineered to work continuously, withstand high-temperature fluctuations and equipment vibrations found in any typical surveillance application. To reduce errors occurred on your RAID data and the chance of the recording performance being affected, it is highly recommended to use HDDs listed on our Approved Vendor List (AVL) to ensure reliability. Find the AVL on our web page: http://www.surveon.com/support/hardware.asp

Performance Validation

Model	RAID Type	Stream1 Resolution	Stream1 FPS	Stream1 Bit Rate	Stream2 Resolution	Stream2 FPS	Stream2 Bit Rate	Recording Channels	Local Live View Channels	Remote Live View Channels	VI Channels
NVR3308A1	RAID 6	1920x1080	30	4mbps	320x240	30	512kbps	64	N/A	128 (64x2)	9
NVR3308A1	RAID 6	1920x1080	30	4mbps	320x240	15	512kbps	64	N/A	128 (64x2)	14
NVR3308A1	RAID 6	1920x1080	15	4mbps	320x240	15	512kbps	64	1+8 *	128 (64x2)	N/A
NVR3308A1	RAID 5	1920x1080	30	4mbps	320x240	30	512kbps	64	(6x6) + (6x6) **	N/A	N/A
NVR3308A1	RAID 5	1920x1080	30	4mbps	320x240	30	512kbps	64	(2x2) + (2x2) ***	N/A	N/A
NVR3308E1	RAID 6	1920x1080	30	4mbps	320x240	30	512kbps	32	N/A	64 (32x2)	16
NVR3308E1	RAID 6	1920x1080	30	4mbps	320x240	30	512kbps	32	N/A	128 (32x4)	14
NVR3308E1	RAID 6	1920x1080	30	4mbps	320x240	15	512kbps	32	N/A	320 (32x10)	N/A
NVR3308E1	RAID 6	1920x1080	15	4mbps	320x240	15	512kbps	32	1+8 *	N/A	12
NVR3308E1	RAID 6	1920x1080	15	4mbps	320x240	15	512kbps	32	1+8 *	128 (32x4)	6
NVR3308E1	RAID 6	1920x1080	15	4mbps	320x240	15	512kbps	32	1+8 *	192 (32x6)	N/A
NVR3308E1	RAID 5	1920x1080	30	4mbps	320x240	30	512kbps	32	6x6	N/A	0
NVR3308E1	RAID 5	1920x1080	30	4mbps	320x240	15	512kbps	32	2x2	N/A	0
NVR3308E1	RAID 5	1920x1080	15	4mbps	320x240	15	512kbps	32	(6x6) + (2+8) ****	N/A	0
NVR3308E1	RAID 5	1920x1080	15	4mbps	320x240	15	512kbps	32	(2x2) + (2+8) *****	N/A	0
NVR3308E1	RAID 5	1920x1080	30	4mbps	320x240	15	512kbps	16	(2x2) + (2+8) *****	N/A	0

* 1x Stream1 + 8x Stream2

** 36x2 Stream2

*** 4x2 Stream1

**** 2x Stream1 + 44x Stream2 ***** 6x Stream1 + 8x Stream2



Oriente 65-A No. 2848, Col. Asturias, Col. Cuauhtémoc, C.P. 06850, México, D.F. Tels.: (55) 5740 4630 / (55) 5740 2142 ventas@telsa.com.mx www.telsa.com.mx

www.surveon.com

